

Figure 1

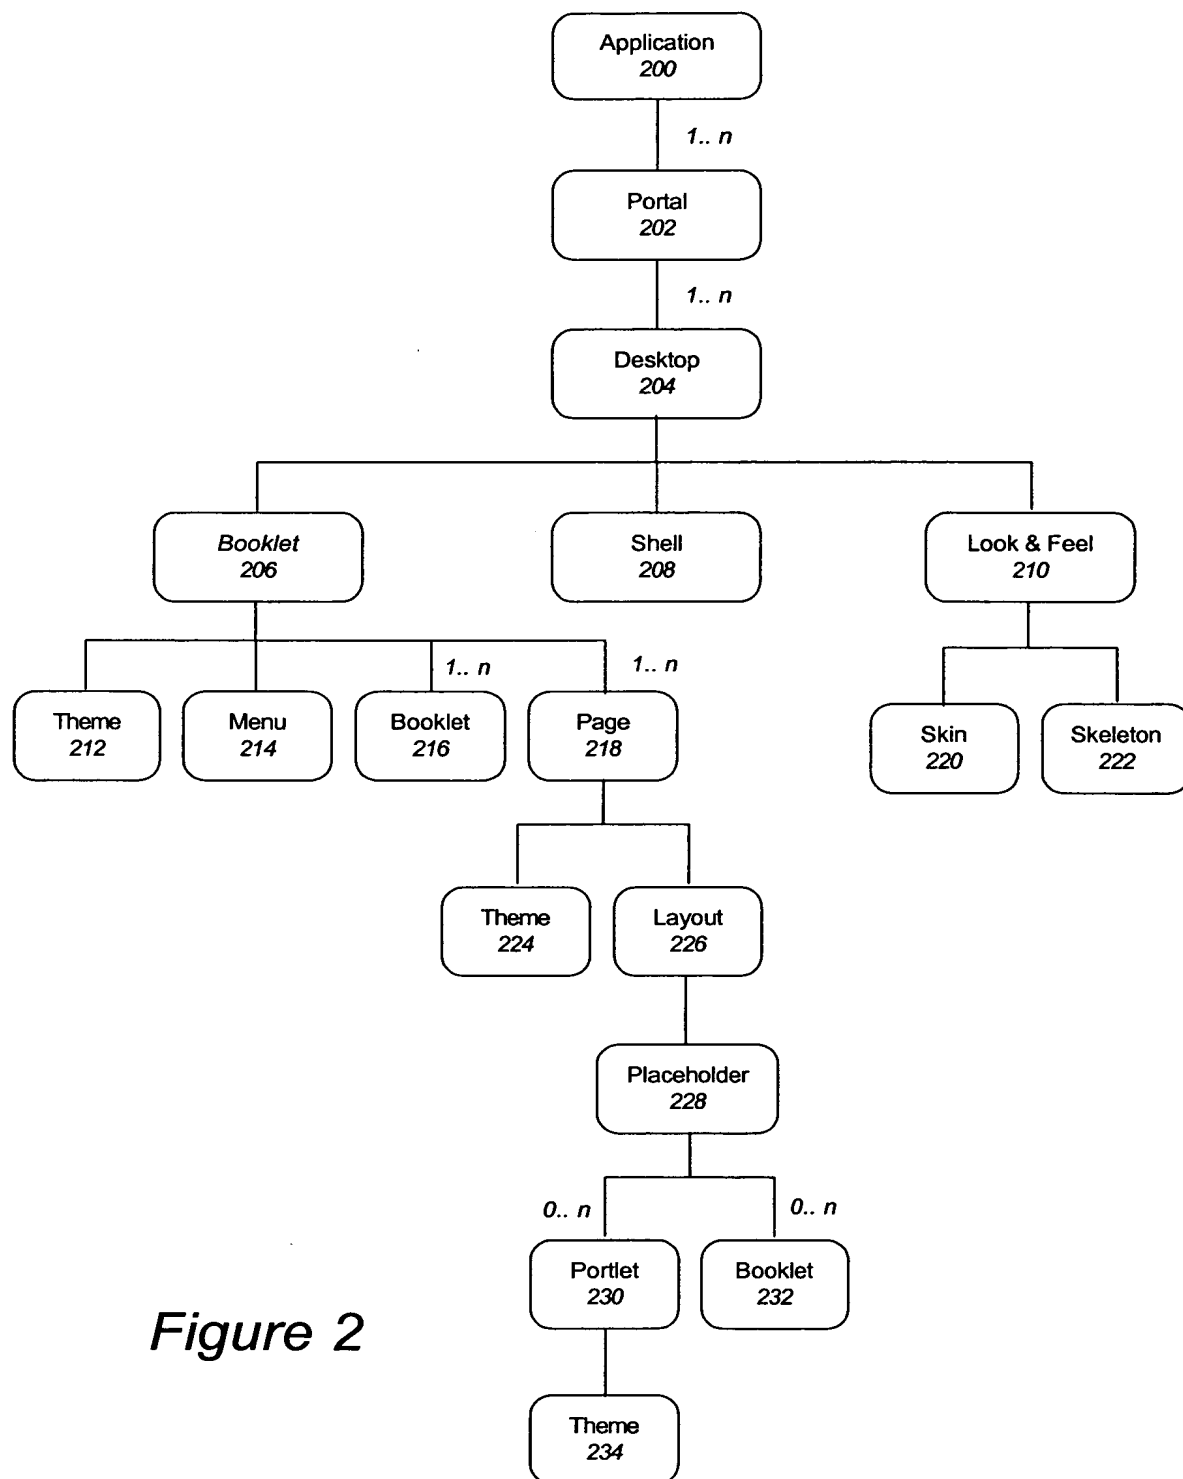


Figure 2

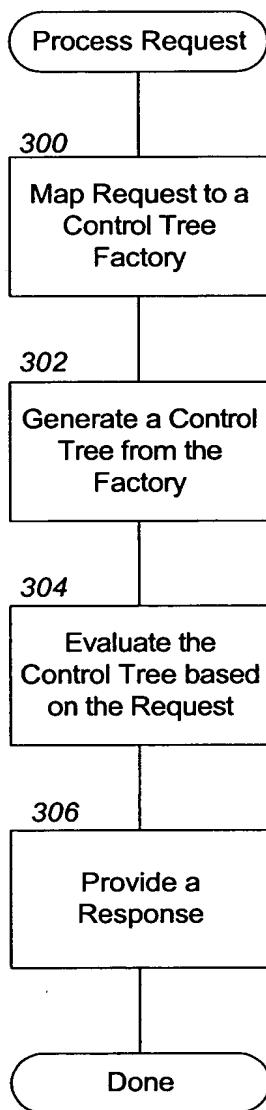


Figure 3

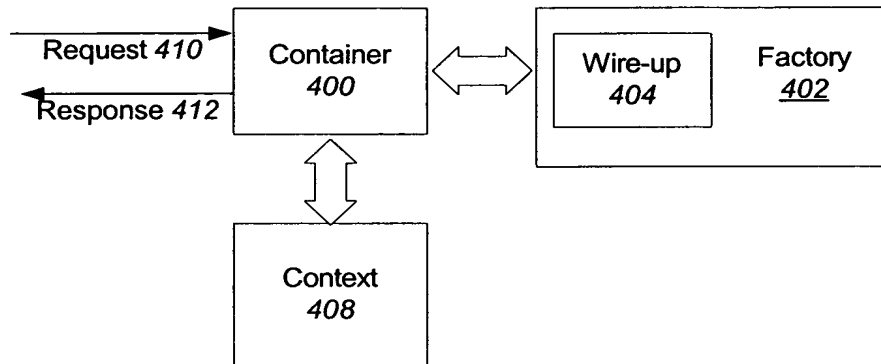


Figure 4

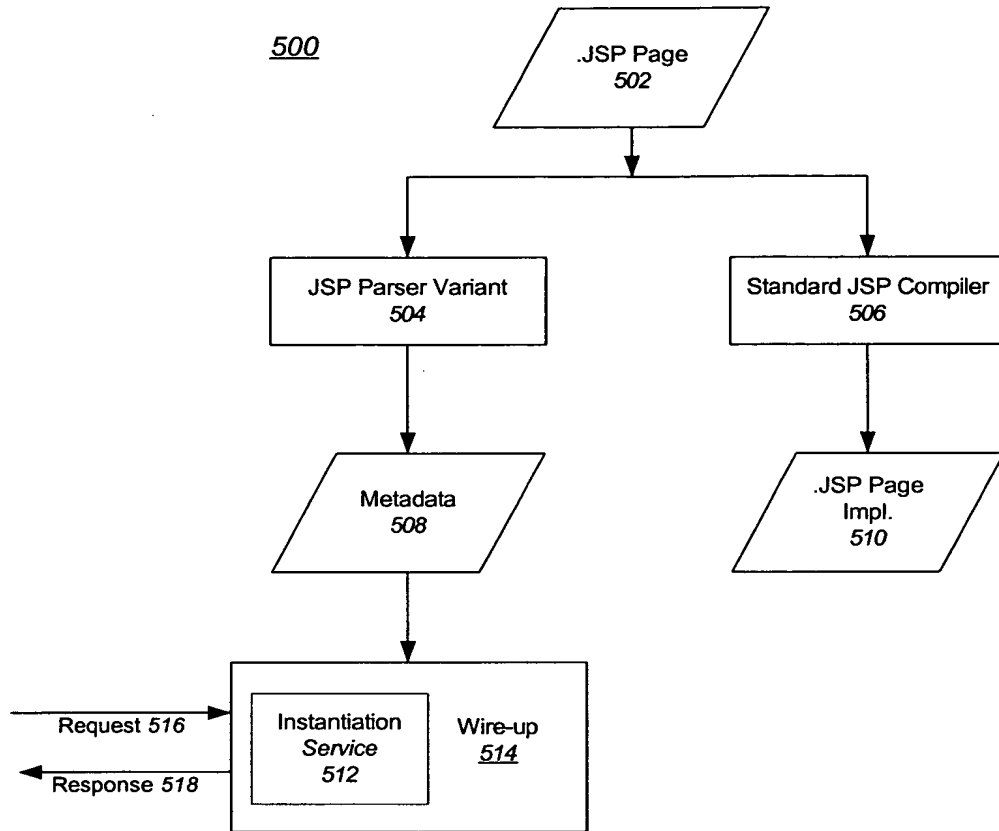


Figure 5

Title: Graphical User Interface Navigation Method
 Inventor(s): Olander, et al.
 Application No.: Not Yet Assigned Attorney: Daniel J. Burns
 Docket No.: BEAS-01375US0 Telephone No.: (415) 362-3800
 Filing date: Filed Herewith Express Mail No.: EV327621973US

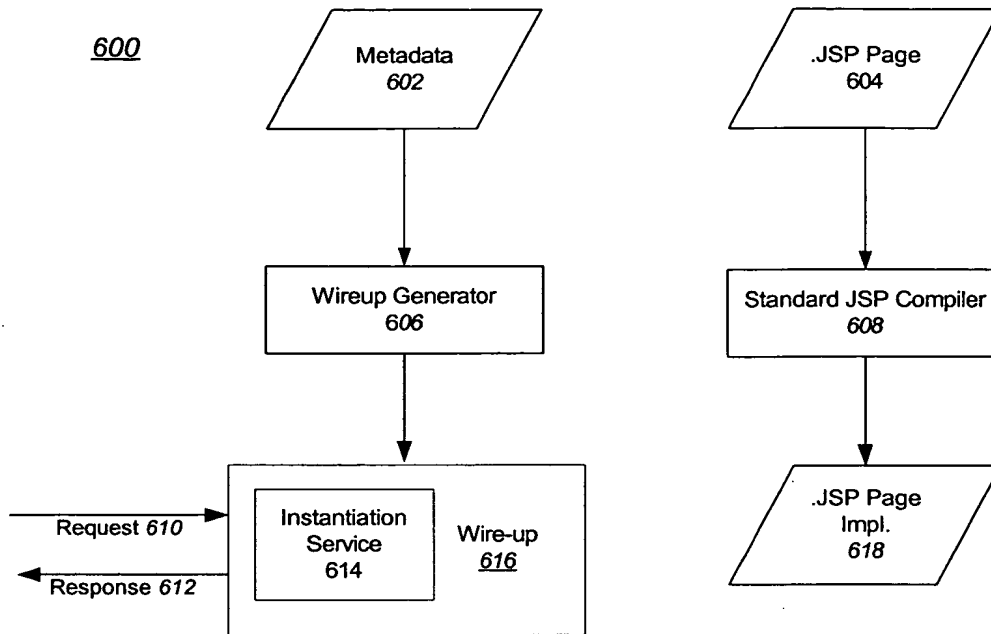


Figure 6

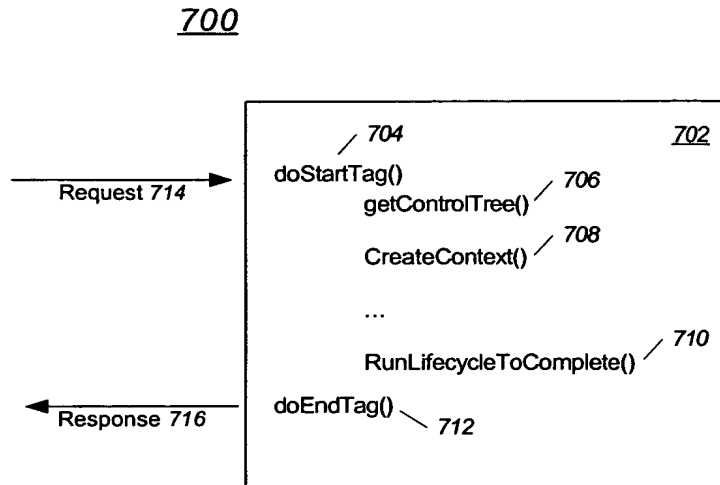


Figure 7

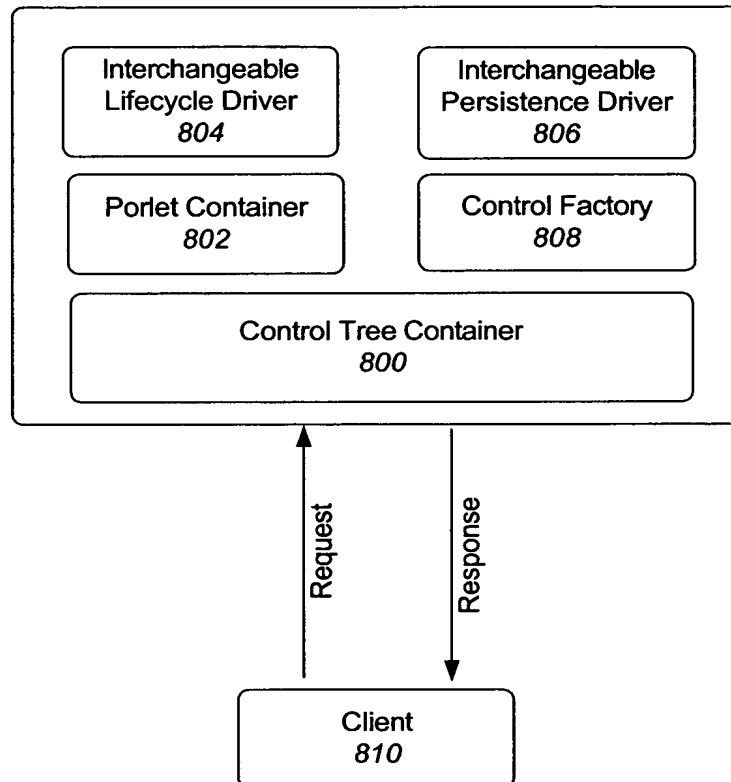


Figure 8

Title:	Graphical User Interface Navigation Method		
Inventor(s):	Olander, et al.		
Application No.:	Not Yet Assigned	Attorney:	Daniel J. Burns
Docket No.:	BEAS-01375US0	Telephone No.:	(415) 362-3800
Filing date:	Filed Herewith	Express Mail No.:	EV327621973US

```

<%@page
import="com.bea.netuix.servlets.controls.window.WindowPresentationContext,com.bea.netu
ix.servlets.controls.window.TitlebarContext"
%>
<%@ taglib uri="render.tld" prefix="render" %>
<% WindowPresentationContext window =
WindowPresentationContext.getWindowPresentationContext(request);
TitlebarContext titlebar
    = (TitlebarContext) window.getFirstChild("window:titlebar");
String expandWidth = "100%";
%>

<render:beginRender>
<div
    <render:writeAttribute name="id" value="<%= window.getPresentationId() %>"/>
    <render:writeAttribute name="class" value="<%= window.getPresentationClass() %>"
        defaultValue="bea-portal-window"/>
    <render:writeAttribute name="style" value="<%= window.getPresentationStyle() %>"/>
    <render:writeAttribute name="width"
        value="<%= window.isPacked() ? null : expandWidth %>"/>
    >
    <% if (titlebar != null) { %>
        <render:renderChild presentationContext="<%= titlebar %>"/>
    <% } %>
    <div class="bea-portal-window-content">
</render:beginRender>
<render:endRender>
    </div>
</div>
</render:endRender>

```

Figure 9